PORTACOOL.

WHEN COMFORT COUNTS™



PORTACOOL PORTABLE EVAPORATIVE COOLERS



KUUL CONTROL COMFORT™ EVAPORATIVE MEDIA

WHAT IS EVAPORATIVE MEDIA?

Evaporative media is the technology at the center of evaporative cooling. This is what allows water to interact with the air. As air and water meet in the media, evaporation occurs.

- Kuul Comfort™ evaporative media is designed and made exclusively to meet the exact performance requirements of Portacool portable evaporative coolers.
- Our media features an exclusive mix of superior raw materials and a proprietary application of geometrical, intelligent design to create the optimal cooling experience.
- Kuul Comfort evaporative media is the driving force behind our superior cooling performance.

For portable evaporative coolers at high air flow velocity, Kuul Comfort™ evaporative media meets efficiency standards and exceeds pressure drop requirements. Not only does Kuul evaporative media last longer, but ensures the portable cooler remains operational at high efficiency for on demand cooling when it is needed most. Effective, clean cooling, stronger, and longer lasting evaporative media with low pressure drop for the lowest total cost of ownership.







WHY KUUL COMFORT™ PERFORMANCE MAKES A DIFFERENCE

- Provides the cooling performance when you need it most, reliably ensuring higher average air mass-flow through the cooler.
- Much lower air-pressure drop allows for greater ventilation rates with less induction air pressure through media. This means higher cooler efficiency and greater mass transfer of air, providing The Kuul Effect™.
- Cleaner air delivery due to the air scrubbing and filtration capabilities of Kuul media when in use. The media scrubs dust and impurities in the air, washing the waste particles into the sump for later disposal.
- The strongest media in the industry lasts much longer than other brands allowing more years of service before the need for replacement.

HOW THE KUUL EFFECT FEELS



WARM
AND DRY

REAL TEMPERATURE
90°F

HUMIDITY
20%

EXPECTED TEMPERATURE*
76°F

HOT
AND DRY

REAL TEMPERATURE
105°F

HUMIDITY
20%

EXPECTED TEMPERATURE*
85°F

HOT
AND HUMID

REAL TEMPERATURE
95°F

HUMIDITY
55%

EXPECTED TEMPERATURE*
82°F

^{*} The temperature drop provided only reflects the performance of Portacool's Kuul Comfort™ evaporative media. The drop does not factor in the velocity or volume of the air provided by our high-performance fans (wind chill). The "real-feel" or perceived temperature will be cooler. Results will vary based on your current conditions.

WHY SHOULD COOLING MATTER TO YOU?

Recently OSHA has enacted HIPP (Heat Illness Prevention Program) – a safety and health program consisting of seven core elements

- 1. Management Leadership
- 2. Worker Participation
- 3. Hazard Identification
- 4. Assessment

- 5. Education and Training
- 6. Program Evaluation
- 7. Improvement

Under HIPP, employers MUST

- a. Provide "Fresh, Pure, and Suitably Cool" water free of charge
- **b.** Allow employees to take a 10 minute cool down rest period WHENEVER they feel heat stress
- c. Have Emergency Response Procedures

If you live in a state that does not have HIPP, you cannot simply ignore heat safety. Businesses in all states can be fined for heat stress non-compliance through I2P2 or IIPP (Injury Illness and Prevention Program).




MANY STATES HAVE BOTH IIPP AND HIPP. ARE YOU COMPLIANT?

IN CALIFORNIA, THE INITIAL PENALTY FOR BUSINESSES FOUND TO BE OUT OF COMPLIANCE WAS BETWEEN \$7,000 AND \$12,000.

FAILURE TO ABATE OR FIX THE ISSUE RESULTS IN A \$15,000 PER DAY FINE.

THE FIVE BRAND PILLARS

Portacool stands for **VALUE** in 5 different, but interconnected ways.

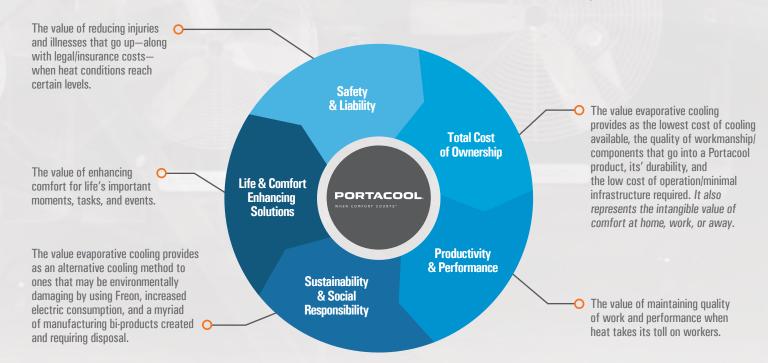



PORTACOOL 510



PORTACOOL 510

Air delivery	757 CFM / 1,286 m³/hr			
Velocity	14 mph / 23 kph			
Amps	1			
Speeds	Two			
Fan blade size	10 in / 25.4 cm			
Cooling capacity	300 s.f. / 28 m²			
Water reservoir	8 G / 30 L			
Dimensions (inches)	35 H x 20 W x 19 D			
Dimensions (cm)	89 H x 51 W x 48 D			
Weight	35 lb / 16 kg			
Decibel level	High - 55 / Low - 49			
Stock number	PAC510			




*Standard 115v

PORTACOOL JETSTREAM™



AIRFLOW PATTERN

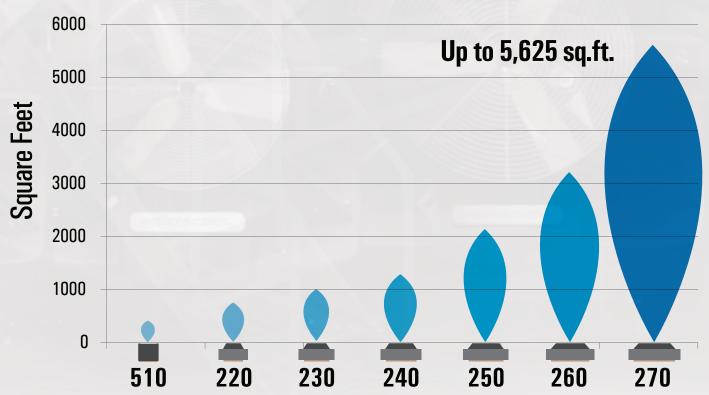



JETSTREAM SERIES


Air delivery	2,400 CFM / 4,078 m ³ /hr		
Velocity	30 mph / 48 kph		
Amps	3.4		
Speeds	Variable		
Fan blade size	Centrifugal fan		
Cooling capacity	700 s.f. / 65 m²		
Water reservoir	20 G / 76 L		
Dimensions (inches)	42 H x 29 W x 27 D		
Dimensions (cm)	107 H x 74 W x 69 D		
Weight	87 lb / 39 kg		
Decibel level	High - 68 / Low - 62		
Stock number	PACJS220		



*Standard 115v



JETSTREAM 220 & 230 FEATURE OSCILLATING LOUVERS!

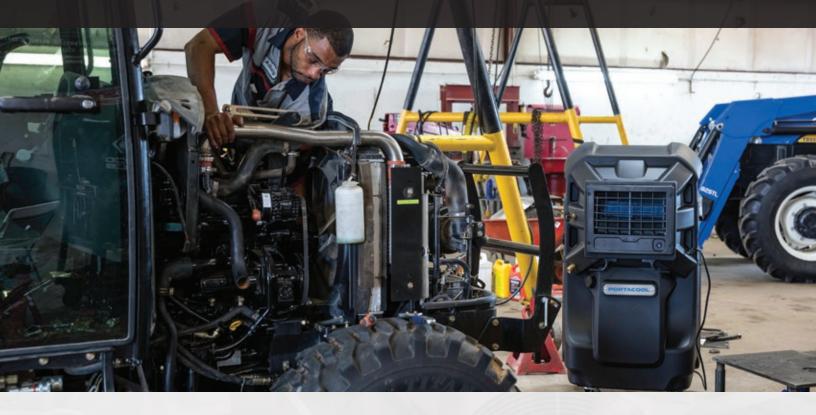




*Standard 115v

Air delivery 3,600 CFM / 6,116				
Velocity	27 mph / 43 kph			
Amps	8.3			
Speeds	Variable			
Fan blade size	Centrifugal fan			
Cooling capacity	900 s.f. / 84 m²			
Water reservoir	30 G / 114 L			
Dimensions (inches)	50 H x 29 W x 27 D			
Dimensions (cm)	127 H x 74 W x 69 D			
Weight	108 lb / 50 kg			
Decibel level	High - 68 / Low - 62			
Stock number	PACJS230			
National Stock Number	4120016522094			



JETSTREAM SERIES

TAKE COOLING MATTERS INTO YOUR OWN HANDS

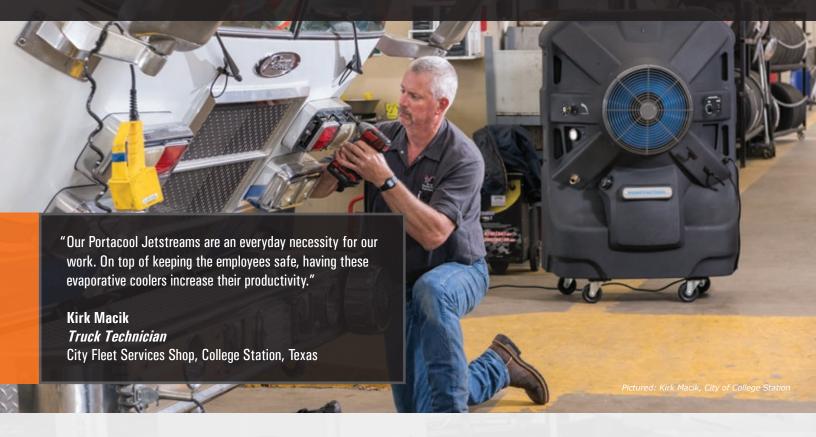



Air delivery	4,500 CFM / 7,646 m ³ /hr			
Velocity	29 mph / 47 kph			
Amps	8.3			
Speeds	Variable			
Fan blade size	16 in / 40.6 cm			
Cooling capacity	1,125 s.f. / 105 m²			
Water reservoir	50 G / 189 L			
Dimensions (inches)	59 H x 40 W x 24 D			
Dimensions (cm)	150 H x 102 W x 61 D			
Weight	134 lb / 60 kg			
Decibel level	High - 76 / Low - 65			
Stock number	PACJS240			
National Stock Number	4120015165237			

JETSTREAM 250

Air delivery	8,500 CFM / 14,441 m ³ /h		
Velocity	24 mph / 39 kph		
Amps	6.6		
Speeds	Variable		
Fan blade size	24 in / 60.9 cm		
Cooling capacity	2,125 s.f. / 197 m ²		
Water reservoir	55 G / 208 L		
Dimensions (inches)	70 H x 52 W x 30 D		
Dimensions (cm)	178 H x 132 W x 76 D		
Weight	191 lb / 87 kg		
Decibel level	High - 78 / Low - 56		
Stock number	PACJS250		
National Stock Number	4120014319353		



PROACTIVE MEASURES AGAINST EXCESSIVE HEAT AIDS SAFETY AND PRODUCTIVITY





JETSTREAM SERIES

COOLING IS MORE THAN A LUXURY, IT CAN BE A MATTER OF LIFE AND DEATH





Air delivery	12,500 CFM / 21,238 m ³ /h		
Velocity	25 mph / 40 kph		
Amps	9.3		
Speeds	Variable		
Fan blade size	36 in / 91.4 cm		
Cooling capacity	3,125 s.f. / 290 m ²		
Water reservoir	60 G / 227 L		
Dimensions (inches)	77 H x 63 W x 30 D		
Dimensions (cm)	196 H x 160 W x 76 D		
Weight	212 lb / 96 kg		
Decibel level	High - 78 / Low - 65		
Stock number	PACJS260		
National Stock Number	4120013933717		

JETSTREAM 270

Air delivery	22,500 CFM / 38,228 m ³ /hr		
Velocity	26 mph / 42 kph		
Amps	15.2		
Speeds	Variable		
Fan blade size	48 in / 121.9 cm		
Cooling capacity	5,625 s.f. / 523 m ²		
Water reservoir	65 G / 246 L		
Dimensions (inches)	90 H x 78 W x 36 D		
Dimensions (cm)	229 H x 198 W x 91 D		
Weight	278 lb / 126 kg		
Decibel level	High - 80 / Low - 58		
Stock number	PACJS270		
National Stock Number	4120014816048		



COMFORTABLE EMPLOYEES ARE PRODUCTIVE EMPLOYEES





HAZARDOUS SERIES











HAZARDOUS 260

	TIALATIDOOD LOO	IIALAIIBUU LI		
Air delivery	12,500 CFM / 21,238 m³/hr	22,500 CFM / 38,228 m³/hr		
Velocity 18 mph / 29 kph		20 mph / 32 kph		
Amps	15.5	19.8		
Speeds	One	One		
Fan blade size	36 inches	48 inches		
Cooling capacity	3,125 s.f. / 290 m²	5,625 s.f. / 523 m²		
Water reservoir 45 G / 170 L		65 G / 246 L		
Dimensions (inches) 78 H x 63 W x 29 D		90 H x 77 W x 35 D		
Dimensions (cm)	198 H x 160 W x 74 D	229 H x 196 W x 89 D		
Weight	302 lb / 137 kg	357 lb / 162 kg		
Decibel level	73	75		
Stock number	PACHZ260	PACHZ270		
National Stock Number	4120014333409	4120014973032		

REPLACEMENT PARTS

Product	Covers	Motor	Pump	Media	Casters	Controls
PACHR3701F1	PARCVRH37000	PARMTRH3700A	PARPMP01620B	PARKULH37000	PARCSTH370F0	PARCTLH00000
PACHR3601A1	PARCVRH36000	PARMTRH3600A	PARPMP01640A	PARKULH36000	PARCSTH360F0	PARCTLH00000
PACJS2701A1	PARCVRJ27000	PARMTRJ2700A	PARPMP01710A	PARKULJ27000	PARPACCST800	PARCTLJ27000
PACJS2601A1	PARCVRJ26000	PARMTRJ2600A	PARPMP01710A	PARKULJ26000	PARPACCST600	PARCTLJ26000
PACJS2501A1	PARCVRJ25000	PARMTRJ2500A	PARPMP01710A	PARKULJ25000	PARPACCST600	PARCTLJ25000
PACJS2401A1	PARCVRJ24000	PARFANJ240F0	PARPMP00060A	PARKULJ24000	PARPACCST400	PARCTLJ24000
PACJS2301A1	PARCVRJ23000	PARFANJ230F0	PARPMP00020A	PARKULJ23000	PARPACCST310	PARCTLJ23000
PACJS2201A1	PARCVRJ22000	PARFANJ220F0	PARPMP00020A	PARKULJ22000	PARPACCST310	PARCTLJ22000
PAC5101A1	PARCVRCYC06	PARFAN0001F0	PARPMPCYC00A	PARKUL510000	PARPACCST001	PARFAN0001F0
PAC2K482S	PAC-CVR-03	MOTOR-010-01	PARPMP01640A	PARKULJ27000	PARPACCST800	CTRL-2SPD-01
PAC2K36HPVS	PAC-CVR-01	MOTOR-012-05	PARPMP01640A	PARKULJ26000	PARPACCST400	CTRL-VS-01
PAC2K363S	PAC-CVR-01	MOTOR-012-02STA	PARPMP01640A	PARKULJ26000	PARPACCST400	CTRL-3SPD-02
PAC2K361S	PAC-CVR-01	MOTOR-012-01STA	PARPMP01640A	PARKULJ26000	PARPACCST400	CTRL-1SPD-01
PAC163SVT	PAC-CVR-04	MOTOR-012-04E	PARPMP01410A	PARKULJ24000	PARPACCST400	CTRL-3SPD-02
PAC2KCYC01	PAC-CVR-02	PARMTRCY130A	PARPMPCYC00A	PARKULCYC300	PARPACCST300	PARCTLCYC00A
PACCYC02	PAC-CVR-C2	PARMTRCY120A	PARPMPCYC00A	PARKULCYC200	PARPACCST300	PARCTLCYC00A



DON'T SEE WHAT YOU ARE LOOKING FOR?

MORE PORTACOOL PARTS AND ACCESSORIES ARE AVAILABLE ONLINE AT

SHOP.PORTACOOL.COM

OR THROUGH YOUR LOCAL DISTRIBUTOR OR RETAIL LOCATION

ACCESSORIES

Portacool Hard Water Treatment

If your water has a high content of minerals, calcium, or lime, Portacool sells a Hard Water Treatment that keeps minerals present in your water supply off of your Kuul Comfort evaporative media. It can help to increase cooling efficiency, remove and inhibit scale build up, reduce equipment corrosion, and extend evaporative media life.

- Removes and inhibits scale build up
- · Increases cooling efficiency
- Reduces equipment corrosion
- · Extends evaporative media life

Covers

- Available in black only
- Constructed for longevity made of durable, high-quality vinyl
- Protection keep Portacool products clean and dust-free



Pack of 4 PARPACHWTB00



Jetstream 250 cover PARCVRJ25000

All cover part numbers listed above



FREQUENTLY ASKED QUESTIONS

How do I maintain my Portacool evaporative cooler?

To keep your Portacool evaporative cooler running smoothly for many years, we recommend daily and weekly maintenance. Each day you run the cooler, the pump should be turned off approximately 15 minutes before the fan is shut off to allow the media to dry completely. Weekly, we recommend shutting down the cooler, disconnecting from the power source, and draining the water tank. Once the tank is empty, the Kuul evaporative media can be removed to clean the tank and inside the cooler.

Can the fan and pump operate separately?

Yes, the fan and pump motors are separate systems. You can run one without the other with no damage to the product. That said, you will not receive the same degree of cooling by only running the fan. For evaporative cooling to occur, water must be running over the evaporative media.

What happens if my evaporative cooler runs out of water?

All Portacool evaporative coolers come with automatic low water shut-off. When the evaporative cooler is out of water, a red light will illuminate on the control panel and the pump will shut off.

Will I need a special plug for my Portacool evaporative cooler?

All Portacool evaporative coolers require a standard three-prong 115v electrical outlet, except the Portacool Jetstream 270 (115v, 20 amp plug required). Portacool Hazardous Location 270 & 260 must be hard-wired by a certified electrician.

What is the warranty on my Portacool evaporative cooler?

All Portacool evaporative coolers come with Portacool Protect™. See your products' Owner's Manual for exact warranty information. Or visit, https://portacool.com/warranty/.

Do evaporative coolers work in humid environments?

While evaporative coolers achieve significant temperature drops in more arid climates and drier spaces, they can provide relief from the heat in any climate due to the advancements in evaporative cooling technology. Even in hot and humid areas, you can still expect to receive cool, comfortable air.

How much moisture will an evaporative cooler add to the environment?

Multiple factors can affect exactly how much humidity and moisture evaporative cooling contributes to an

environment. An increase in humidity of approximately two to five percent is produced depending on the temperature and humidity of the environment. This increase is not noticeable in a ventilated area where the air produced by the cooler is exhausted. When properly ventilated, an evaporative cooler will not cause condensation or rust.

Can I use the cooler outside?

Evaporative coolers are designed to work best in areas not easily cooled by traditional air conditioning, so outside is an excellent environment!

Do I need a constant hose connection?

All Portacool products come with both a fill tank and hose connector, with the exception of the Portacool 510. This gives you the option to keep a hose connected or manually fill the tank. Along with these features, Portacool products also come equipped with automatic low water shut-off.

When the evaporative cooler is out of water, a red light will illuminate on the control panel and the pump will shut off.

What can I expect in a temperature difference?

Portacool evaporative coolers CAN drop the air temperature up to 30°F when the air is very dry and where relative humidity can be 30% or less. Even in humid climates our products can still easily produce a significant temperature change.

How long will my Kuul media last?

Depending on the quality of maintenance and water, Kuul evaporative media typically last 5 years or more.

Will I get wet? Does the product mist?

Portacool evaporative coolers are not misting fans, so there should be no water coming out of the product. The products do use water, but the process of evaporation produces cooler air without a mist, so you won't get wet. A small amount of humidity is added to the air, but with proper ventilation, it is not noticeable and will not cause rust formation on equipment.

NEED MORE INFORMATION?

Find more information about Portacool online at www.portacool.com or shop.portacool.com

- Keep up-to-date on new product releases
- See enhanced product content
- Find distributors and rental locations
- Download literature

Order replacement parts and accessories

PORTACOOL

- Read customer testimonials
- Watch Portacool-related videos







VIDEOS



CHANGING YOUR EVAPORATIVE MEDIA



JETSTREAM OVERVIEW



KUUL EVAPORATIVE MEDIA OVERVIEW



PORTACOOL DEMO



SETTING UP YOUR PORTACOOL



THE POWER OF EVAPORATIVE COOLING

— POWERED BY —



PORTACOOL.

WHEN COMFORT COUNTS™



VISIT PORTACOOL.COM OR CALL 936-598-5651 **FOR MORE INFORMATION**

PORTACOOL PARTS AND ACCESSORIES ARE AVAILABLE ONLINE AT SHOP.PORTACOOL.COM
OR THROUGH YOUR LOCAL DISTRIBUTOR OR RETAIL LOCATION











